

TECHNICAL CHARACTERISTICS

- > Height above ground:
 - fixed version: 2200 or 4500 mm
 - adjustable version: from 2200 mm to 3570 mm
- > 2 road widths:
 - 3850 to 5200 mm, no tension cables
 - 5250 to 7550 mm, with tension cables
- > Structure: steel tubes, 80 x 80 mm or 120 x 120 mm
- > The cross bar (70 x 70 mm) slides to adapt the installation to the site requirements

INSTALLATION

- > Installation: on base plates with stencil and ground hooks included in the pre-installation kit
- > Should you wish, you may order the install kit before receiving the height restrictor to prepare ground works

OPTIONS


- > Attachment kit for Ø 450 mm sign available for all of our height restrictors (sign not included) - Code 202321
- > Height restrictor rail: L 1500 x Ø 50 mm. Lacquered white over a galvanised steel with red reflective strips with 500 mm of chain and hooks. Use 2 units per height restrictor - Code 202601

PRODUCT CODES

	Height restrictor	Pre-installation kit
Fixed height restrictor, H 2200 mm		
Width 3850 to 5200 mm (no tension cables)	202330	202610
Width 5250 to 7550 mm (with tension cables)	202331	202612
Fixed height restrictor, adjustable H 2200-3570 mm		
Width 3850 to 5200 mm (no tension cables)	202340	202610
Width 3850 to 5200 mm (no tension cables)	202341	202615
Fixed height restrictor, H 4500 mm		
Width 3850 to 5200 mm (no tension cables)	202332	202615
Width 5250 to 7550 mm (no tension cables)	202342	202615



DRAWINGS

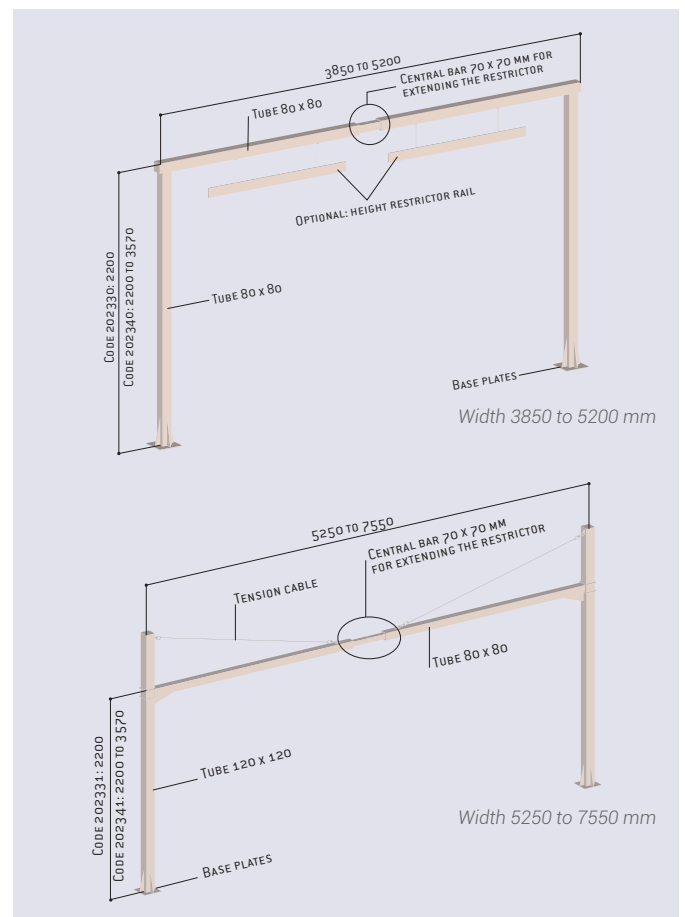

Option: sign attachment kit
Code 202321

Option height gauge rail
Code 202601

FINISH PAINTED

- > Lacquered in white over galvanised steel with red reflective strips



white with
red bands

