

TECHNICAL CHARACTERISTICS

- > Access height (under cross bar): from 1.9 to 4 m
- > Width: from 5 to 12 m
- > Structure: steel tubes, 120 x 120 mm and 80 x 80 mm. Equipped with single or double tension cable
- > Locking: with stainless steel pins. Pin locked with padlock (included) or 11 mm triangle-key lock (factory fitted when order placed)
- > Mounted on a cylindrical shaft with rotation handles and stops to hold the height restrictor in closed position or open position at a 90 degree angle
- > The cross bar (70 x 70 mm) slides to adapt the installation to the site requirements



INSTALLATION

- > Installation: on base plates with stencil and ground hooks included in the pre-installation kit
- > Levelling: with locknuts placed under the base plates
- > Should you wish, you may order the install kit before receiving the height restrictor to prepare ground works

OPTIONS

- > Attachment kit for Ø 450 mm sign available for all of our height restrictors (sign not included) - Code 202321
- > Height restrictor rail: L 1500 x Ø 50 mm. Lacquered white over a galvanised steel with red reflective strips with 500 mm of chain and hooks. Use 2 units per height restrictor - Code 202601

PRODUCT CODES

	Height restrictor	Pre-installation kit
Adjustable width: 5 to 7 m		
Adjustable height: 1.9 to 2.5 m	202511	202611
Adjustable height: 2.5 to 3.5 m	202517	202615
Adjustable height: 3.5 to 4 m	202518	202622
Adjustable width: 7 to 12 m		
Adjustable height: 1.9 to 2.5 m	202514	202615
Adjustable height: 2.5 to 3.5 m	202515	202622
Adjustable height: 3.5 to 3.7 m	202519	202622


FINISH PAINTED

- > Lacquered in white over galvanised steel with red reflective strips



white with red bands

DRAWINGS

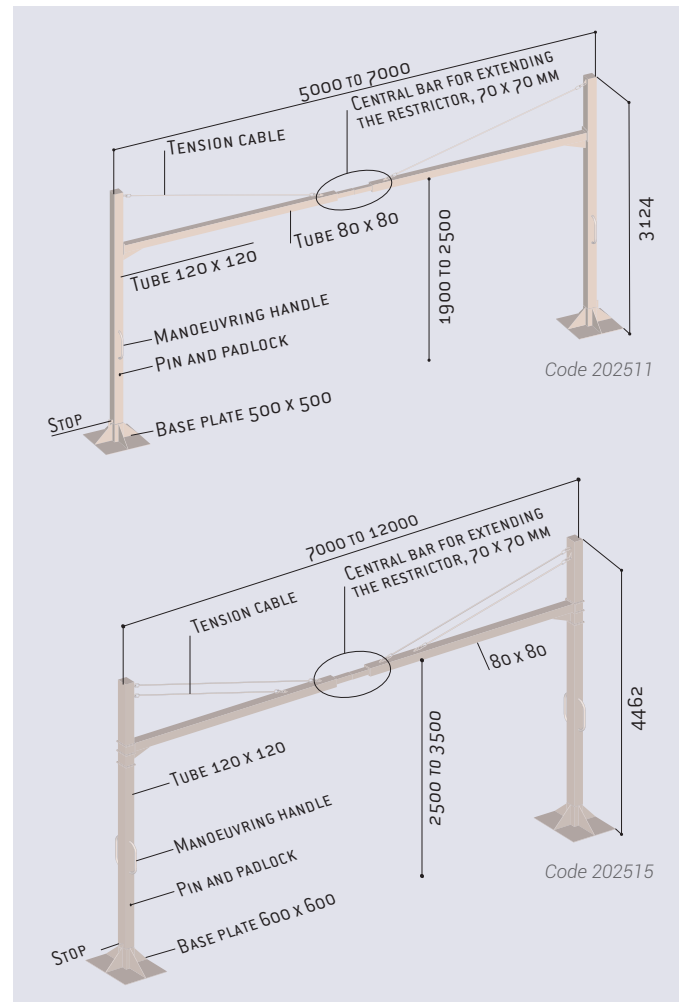

Option: sign attachment kit
Code 202321

Option height gauge rail
Code 202601

