

For safety, the exposed slots for our removable bollard kits are smaller than 2 cm.

TECHNICAL SPECIFICATION

- > Removable-bollard system for \varnothing 76, 90, 102 and 114 mm steel bollards
- > Depth to which bollards extend into the socket: 180 mm
- > Self-draining: through gravel at bottom of sockets
- > Easy maintenance: reservoir allows for accumulation of sand and dirt, disassembles for complete maintenance
- > Galvanised, with stainless-steel mechanism for complete protection from corrosion
- > Fixed central boss flush with the ground leaving no dangerous hole when the bollard is removed

INSTALLATION

- > Concreted directly into ground
- > Orientation indicator for chain posts

PRODUCT CODES

Lockblock® 21 for \varnothing 76 mm steel bollards	206557
Lockblock® 21 for \varnothing 90 mm steel bollards	206556
Lockblock® 21 for \varnothing 102 mm steel bollards	206553
Lockblock® 21 for \varnothing 114 mm steel bollards	206558

FINISH

- > Galvanised with stainless-steel mechanism
- > After installation, visible parts are lacquered in black




Black



Galva



INSTALLATION GUIDE

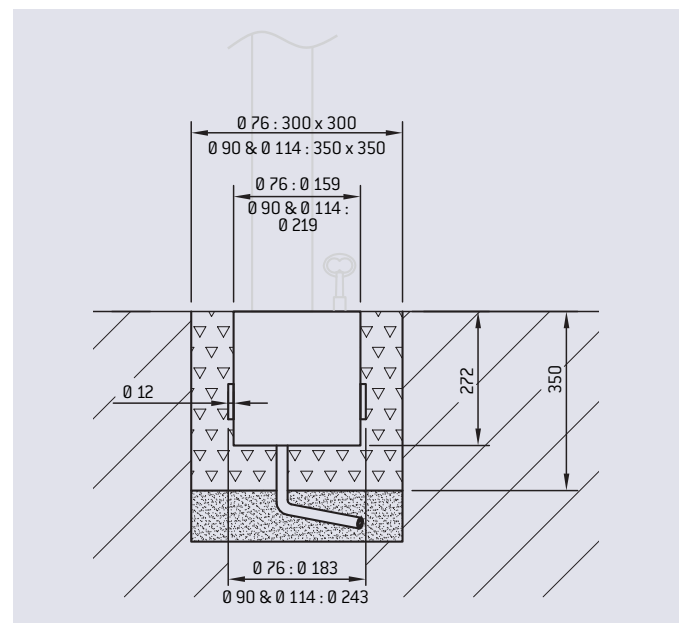

OPERATION

TO UNLOCK:

Unlocks with 11 mm triangle key and by turning the bollard. Stand upright to remove bollard



TO LOCK:

Simply turn the bollard, no need to bend down



Lockblock® 21