

MODULO wheelie bin enclosure

>> Return cladding in Lengths 2500 mm <<



TECHNICAL SPECIFICATIONS

- > Dimensions: width 2500 or 5000 mm
- > Three depths: 2000, 3400 or 4800 mm
- > Roof: anodised aluminium sections, 40 x 40 mm tubular steel cross-members and 10 mm thick UV-resistant polycarbonate honeycomb panels
- > Panels: compact laminate, thickness 13 mm, Height 1500 mm (composed of 7 slats). Choice of two finishes: light oak or mahogany

INSTALLATION RECOMMENDATIONS

- > Installation to be concreted directly into the ground or on base plates adjustable in height (max 80 mm)



Ref. 529782 + 529787

OPTION

- > Front return cladding in compact laminate


REFERENCES

	Concrete fix		On base plates	
	Lg 2500 mm	Lg 5000 mm	Lg 2500 mm	Lg 5000 mm
Depth 2000 mm	529780	529781	599780	599781
Depth 3400 mm	529782	529783	599782	599783
Depth 4800 mm	529784	529785	599784	599785
Options: front return cladding				
Length 1400 mm	529787		599787	
Length 2500 mm	NEW 529788		599788	



Ref. 529780

DIAGRAM

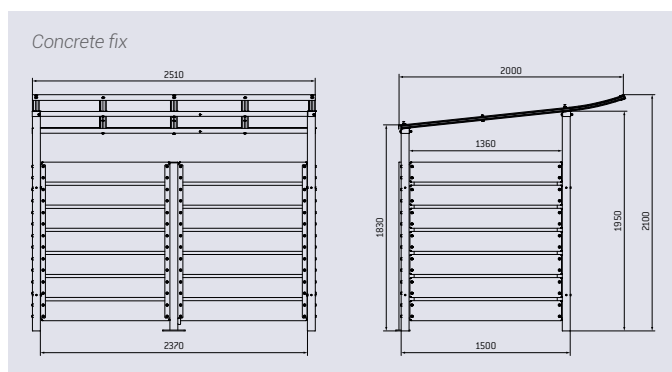

PAINT FINISH

- > Galvanised and painted steel in our colours
- > Anodised aluminium profiles
- > Compact laminate panels in a choice of finishes: light oak or mahogany

RAL 3020	RAL 3004	RAL 5010	RAL 6005	RAL 8017	Light oak
RAL 7044	RAL 9010	RAL 9005	PROCITY® Grey	Corten effect	Mahogany



Ref. 599781