

TECHNICAL CHARACTERISTICS

- > Length of one unit: 3000 mm
- > Total depth: 1550 mm
- > Height: 2450 mm
- > Posts: steel tube, 180 x 100 x 5 mm
- > Horizontal beam: steel tube, 120 x 120 mm
- > Roof: protective 8 mm polycarbonate with anti-UV treatment
- > Rear and side cladding: 8 mm Securit® safety glass with safety etching
- > Timetable display case: 750 x 750 mm (6 A4) x 30 mm deep, in anodised aluminium. Replaceable and reversible door. Glazing 4 mm plexichoc. Security lock 2 keys. Elastomer gasket. Backplate white lacquered galvanised sheet metal. Fixings provided
- > Notice board:
 - Double sided "2000" notice board / poster case
 - 75 mm deep aluminium frame
 - Attached to the shelter, fixed to the posts by clamps
 - Raising door in 4 mm security glass door assisted by gas struts
 - Display area: h 1750 x 1200 mm
 - Lighting optional, contact us
- > Possibility of signage support on 3 sides (sign writing not provided)



Code 306710
+ perch seat sold separately (306721)



Code 306711

INSTALLATION

- > Concreted directly into ground.
- > Assembly and installation instruction available
- > *Note:* do not install benches or perch seats near the timetable display case, in order to avoid blocking the opening

OPTION


- > Option with LED lighting powered by 220V power supply. *Electrical wiring (not included) must be installed by a professional electrician 306719*

FINISH PAINTED

- > Galvanised and painted in our colours

				
RAL 3020	RAL 3004	RAL 5010	RAL 6005	RAL 8017
				
RAL 7044	RAL 9010	RAL 9005	PROCITY® Grey	Corten effect


DRAWING

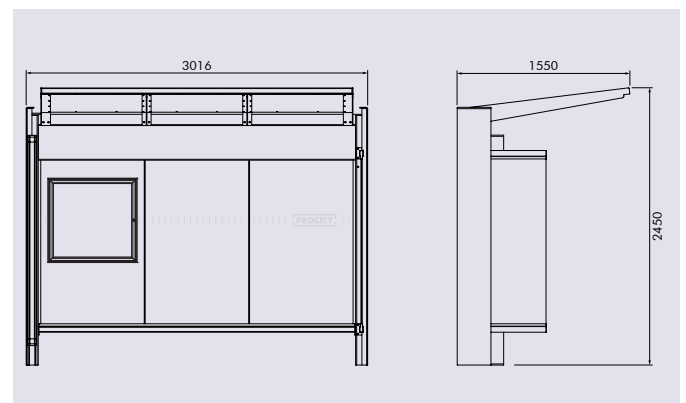

Allowing a large surface area for signage (not supplied)


PRODUCT CODES

> All of our models are supplied with rear cladding and timetable display case



Length 3000 mm
with no side cladding

306710



Length 3000 mm
with two side claddings

306711



Length 3000 mm
with notice board on the left and
side cladding on the right

306712



Code 306712



Code 306711